

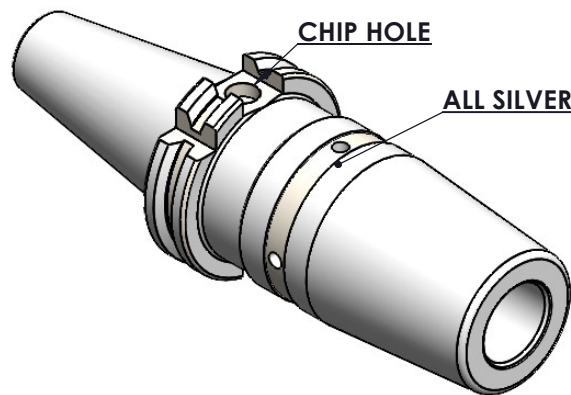


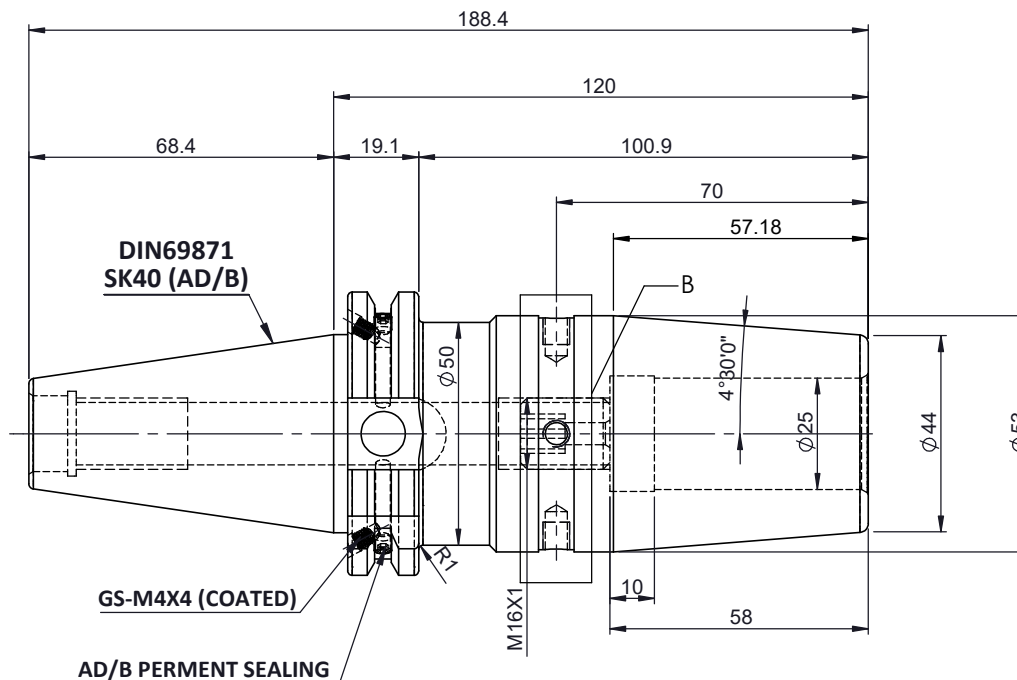

CHIP HOLE

All Dimensions are in MM

ALL SILVER LOOK




DIN69871
SK40 (AD/B)

GS-M4X4 (COATED)

AD/B PERMENT SEALING

For Customer Approval



LABEL :

2002265.2501

SCHRUMPFUTTER

SHRINK FIT HOLDER

ISO 7388-1 (DIN69871) SK40 AD/AF (AD+B)

SR2 25mm X 120mm

G2,5/25000 U/MIN

MARKING : ISO 7388-1 (DIN69871) SK40 AD/AF (AD+B) SR25H120

G2,5/25000 U/MIN

4	GS-M4X4 COATED	GRUB SCREW	2
3	GS-M4X4	GRUB SCREW-(B.O)	2
2	SCWM16x1x20	STOPPER SCREW	1
1	F1S409H-SFC25120	SK40SFC25120FWW	1
2	PART NUMBER	DESCRIPTION	1

Notes	
Balancing Value	G2.5 @ 25000RPM
Approx Weight	2.0 Kg

			μ m	0.012/0.025	0.05	0.1/0.2	0.4/0.8	1.6	3.2	6.3	12.5	25	50						
			GRADES	N1	N2	N3	N4	N5	N6	N7	N8	N9	N10	N11	N12				
			SYMBOLS																
TOLERANCE			MATERIALS: HDS		2024	NAME	DATE												
FREE DIMENSIONS					DRAWN	KATHIR	29/08												
TOLERANCE					CHECKED	RVL	29/08												
					APPROVED														
					SCALE : NTS		QTY. :												
Dimns.	Dia	Length			2002265.2501														
0.5 to 3	± 0.05	± 0.10																	
3 to 6	± 0.10	± 0.15																	
6 to 30	± 0.15	± 0.20																	
30 to 120	± 0.20	± 0.25																	
120 to 500	± 0.30	± 0.50			PART NAME:										DRAWING No.				REV.
			SK40SFC25120FWW		F1S409H-SFC25120													00	

2002265.2501