

All Dimensions are in MM



CHIP HOLE

ALL SILVER LOOK

GS-M16x2x14

23.9

SECTION A-A

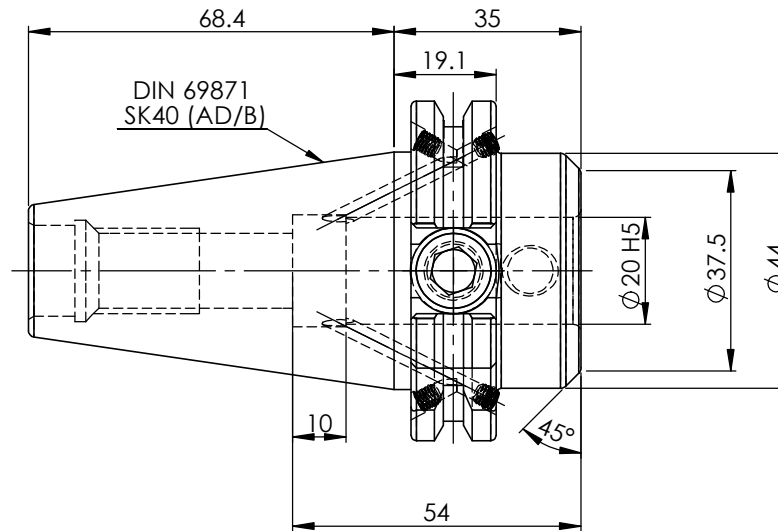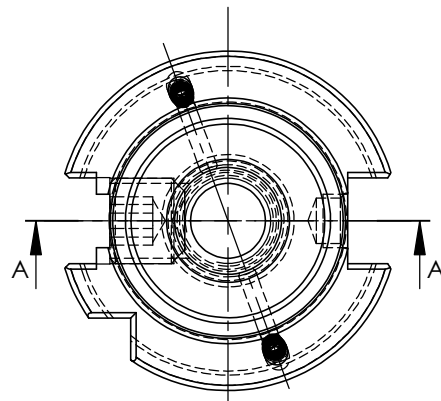

NOTE:

BALANCING 2.5G AT 25000 RPM

WEIGHT :0.9 Kg

		μ m	0.012	0.025	0.05	0.1	0.2	0.4	0.8	1.6	3.2	6.3	12.5	25	50
		GRADES	N1	N2	N3	N4	N5	N6	N7	N8	N9	N10	N11	N12	
		SYMBOLS	▽▽▽					▽▽		▽▽			▽		~
TOLERANCE			MATERIALS: 16MnCr5			2015	NAME	DATE	© 2002364.2004						
FREE DIMENSIONS						DRAWN	ELA	02/08							
TOLERANCE			CHECKED	RVL	02/08										
			APPROVED												
			SCALE : NTS QTY. :												
Dimns.	Dia	Length													
0.5 to 3	± 0.05	± 0.10													
3 to 6	± 0.10	± 0.15													
6 to 30	± 0.15	± 0.20													
30 to 120	± 0.20	± 0.25													
120 to 500	± 0.30	± 0.50													
PART NAME:								DRAWING No.							REV.
SK40EM20035FWW								FWS409H-EMH20035							05

LABEL : ©
2002364.2004
EXTRA KURZE WELDON-AUFNAHME
EXTRA SHORT WELDON HOLDER
ISO7388-1 (DIN 69871) SK40 AD/AF (AD+B)
WE 20 mm x 35 mm
G2.5 25000 U/MIN

MARKING:ISO7388-1 (DIN 69871)SK40 AD/AF (AD+B) WE20 H035
G2.5 25000 U/MIN

ITEM NO.	PART NUMBER	DESCRIPTION	QTY.
1	FWS409H-EMH20035	SK40EM20035FWW	1
2	GS-M4X4	GRUB SCREW	4
3	GRUB SCREW M16x2x14	GRUB SCREW	1