
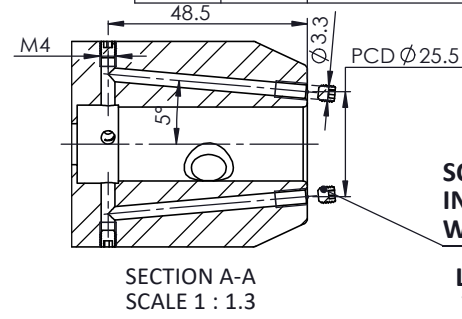




All Dimensions are in MM

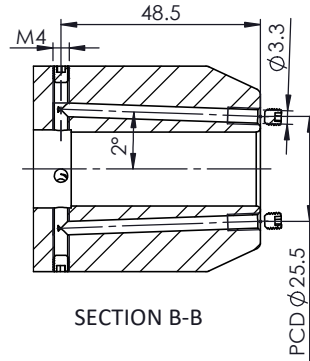

For Customer Approval

SCREWS TO BE PACKED SEPERATELY
IN PLASTIC POUCH WITH LABEL & PUT INTO
WELDON BORE & THEN SEAL THE HOLDER WITH COVER

LABEL FOR PLASTIC BAGS:
Verschlusschraube
Grub Screw
M4 X 4mm x 2mm

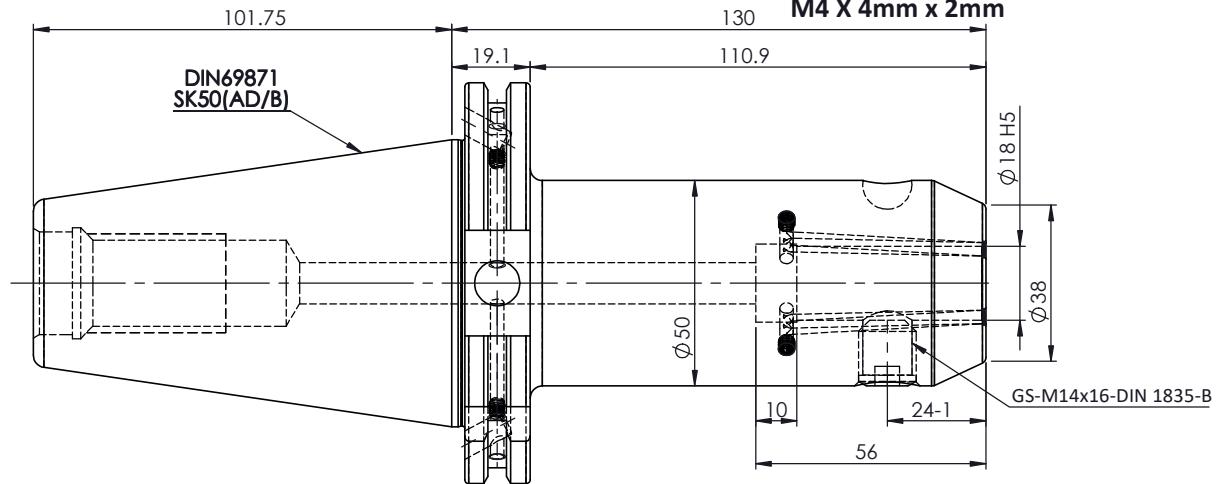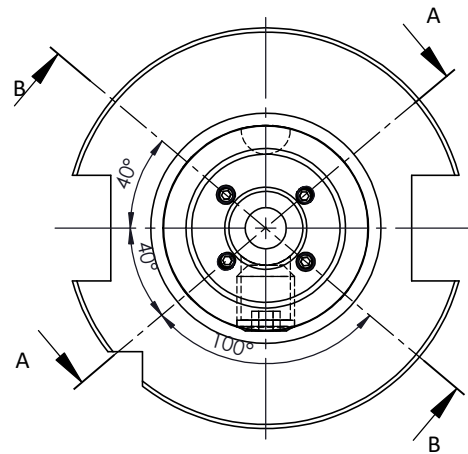

LABEL :

2002366.1805
WELDON-AUFNAHME MIT KK
WELD.HOLDER COOL.CHANNEL
ISO 7388-1 (DIN69871) SK50 AD/AF (AD+B)
WK 18 mm x 130 mm
G2.5 25000 U/MIN

MARKING : ISO 7388-1 (DIN69871) SK50 AD/AF (AD+B) WK18 H130
G2.5 25000 U/MIN

NOTE :

BALANCING 2.5G AT 25000 RPM

WEIGHT :4.1 Kg

			μ m	0.012	0.025	0.05	0.1	0.2	0.4	0.8	1.6	3.2	6.3	12.5	25	50
			GRADES	N1	N2	N3	N4	N5	N6	N7	N8	N9	N10	N11	N12	
			SYMBOLS													
TOLERANCE			MATERIALS: 16MnCr5			2023		NAME		DATE		2002366.1805				
FREE DIMENSIONS						DRAWN		SVR		09/12						
TOLERANCE			CHECKED		RVL		09/12									
			APPROVED													
			SCALE : NTS		QTY. :											
Dimns.	Dia	Length														
0.5 to 3	± 0.05	± 0.10														
3 to 6	± 0.10	± 0.15														
6 to 30	± 0.15	± 0.20		PART NAME:							DRAWING No.				REV.	
30 to 120	± 0.20	± 0.25		SK50EK18130FWW							FWS509H-EKH18130				00	
120 to 500	± 0.30	± 0.50														