
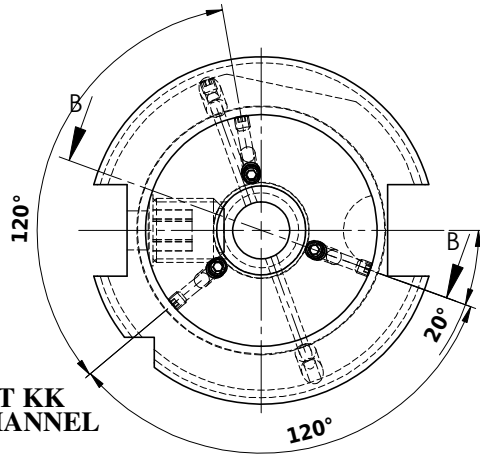


All Dimensions are in MM

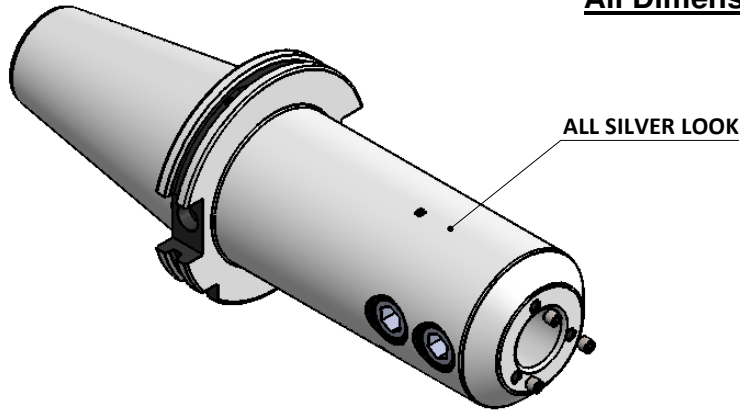

Label :
2002366.2502
WELDON-AUFNAHME MIT KK
WELD.HOLDER COOL.CHANNEL
DIN69871 SK50 ADB
Wk 25 mm x 160 mm
G2.5 / 25000 U/MIN

NOTE :


BALANCING 2.5G AT 25000 RPM

WEIGHT : 5.62 kg

**MARKING : DIN 69871 AD/B SK50 WK25H160
G2.5 25000 U/MIN**

ITEM NO.	PART NUMBER	DESCRIPTION	QTY.
1	GS-M18X2X20-DIN1835-B	GRUB SCREW-(B.O.)	2
2	GS-M4X4	GRUB SCREW-(B.O)	5
3	GS-M5X5	GRUB SCREW(B.O)	3
4	FWS509H-EKH25160	SK50EK25160FWW	1

Rev.No.	Ch.Let	Alterations	Date	Sign.	Appd.

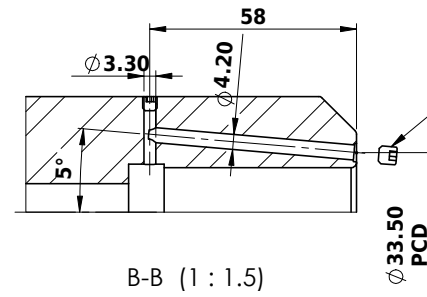


**SCREWS TO BE PACKED SEPERATELY
IN PLASTIC POUCH WITH LABEL & PUT INTO
WELDON BORE & THEN SEAL THE HOLDER WITH COVER**

LABEL FOR PLASTIC BAGS:
 verschlussschraube
 Grub Screw
 M5 X 5mm x 2.5 mm

CUSTOMER APPROVAL REQUIRED	
APPROVED BY	
DATE	

FOR QUOTATION PURPOSE ONLY

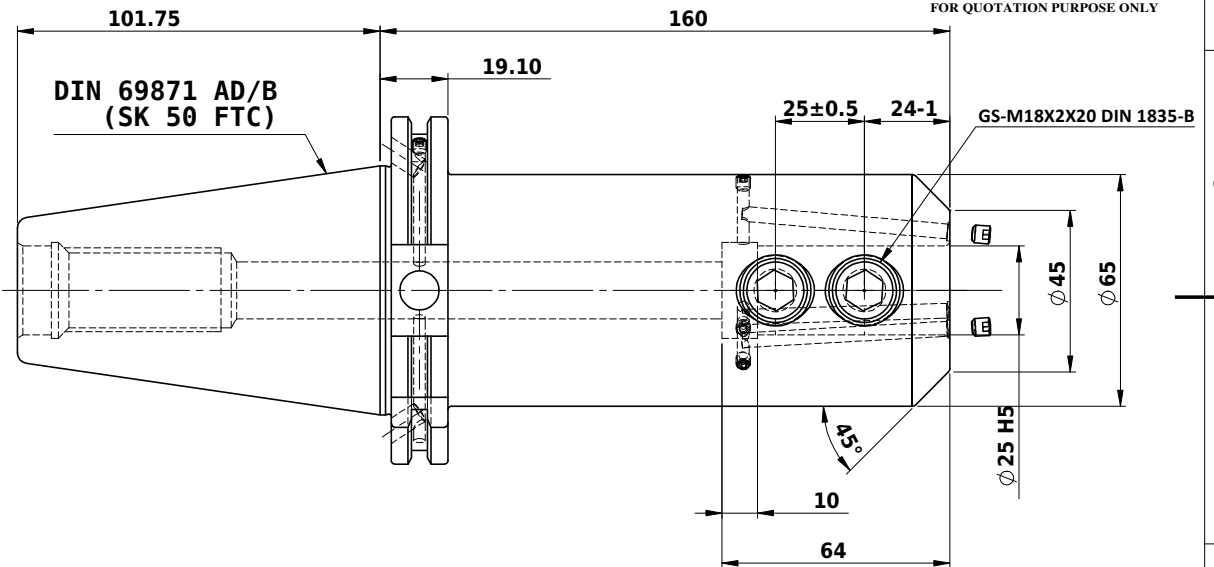

			μ m	0.012	0.025	0.05	0.1	0.2	0.4	0.8	1.6	3.2	6.3	12.5	25	50
			GRADES	N1	N2	N3	N4	N5	N6	N7	N8	N9	N10	N11	N12	
			SYMBOLS													
TOLERANCE			MATERIALS:			2017		NAME		DATE		2002366.2502				
FREE DIMENSIONS			16MnCr5			DRAWN		SVK		30/10						
TOLERANCE						CHECKED		RVL		30/10						
						APPROVED										
						SCALE : NTS		QTY. :								
Dimms.	Dia	Length				PART NAME: SK50EK25160FWW						DRAWING No. FWS509H-EKH25160			REV. 00	
0.5 to 3	± 0.05	± 0.10														
3 to 6	± 0.10	± 0.15														
6 to 30	± 0.15	± 0.20														
30 to 120	± 0.20	± 0.25														
120 to 500	± 0.30	± 0.50														