


**All Dimensions are in MM**

**ALL SILVER LOOK**

The image shows a technical drawing of a mechanical part. The top view is a 3D isometric representation of a cylindrical component with a flange and a central hole. A label 'ALL SILVER LOOK' points to the central hole. The bottom view is a 2D top-down view of the same component, showing the circular profile with a central hole and two small rectangular features on the outer edge. Dashed lines indicate hidden internal features.

| 5       |        | 6           |  | 7 |      | 8     |       |
|---------|--------|-------------|--|---|------|-------|-------|
| Rev.No. | Ch.Let | Alterations |  |   | Date | Sign. | Appd. |
|         |        |             |  |   |      |       |       |
|         |        |             |  |   |      |       |       |
|         |        |             |  |   |      |       |       |

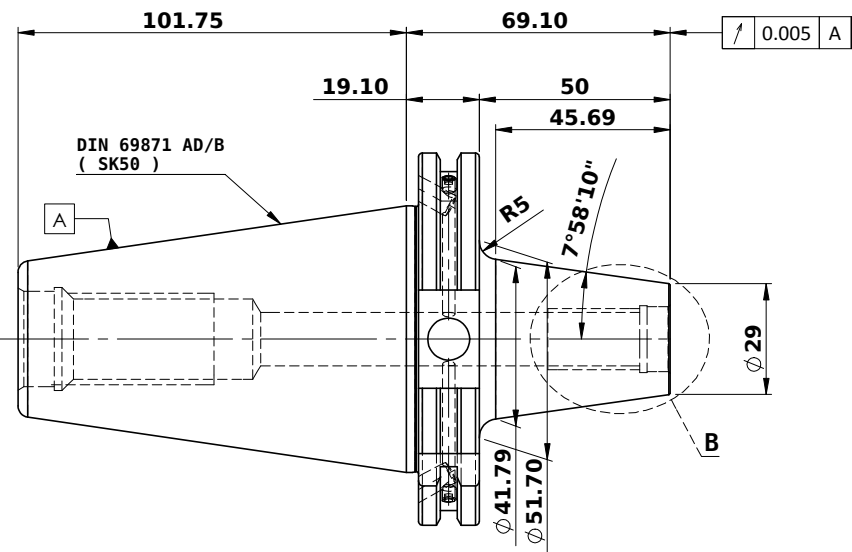

**MARKING:-** DIN 69871 SK50 AD&B M16 x 050  
G2,5 25000

**DETAIL B**  
(2 : 1.4)

**M16**  
0.01 | A


**2002370.1600**  
**EINSCHRAUBFRÄSERAUFNAHME**  
**SCREW-ON HOLDER**  
**DIN69871 SK50 ADB**  
**ESS M16 x 050 mm x 069 mm**  
**G2,5 / 25000**

**DETAIL B**  
**(2 : 1.4)**


**MARKING:- DIN 69871 SK50 AD&B M16 x 050**  
**G2,5 25000**

WT : 2.9 KG

### BALANCING 2.5 G @ 25000 RPM

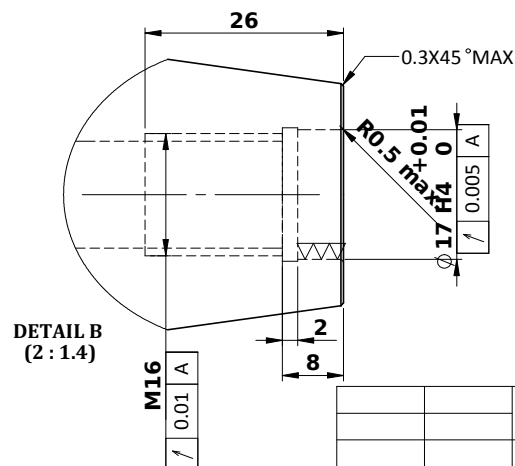

| ITEM NO. | PART NUMBER      | DESCRIPTION       | QTY. |
|----------|------------------|-------------------|------|
| 1        | FWS509H-TMH16069 | SK50TMH16069FWW   | 1    |
| 2        | GS-M4X4          | GRUB SCREW-(B.O.) | 2    |

|                 |  |  |                       |                                                                                       |        |       |                                                                                       |      |                                                                                       |       |     |                                                                                       |     |                                                                                       |     |                |
|-----------------|--|--|-----------------------|---------------------------------------------------------------------------------------|--------|-------|---------------------------------------------------------------------------------------|------|---------------------------------------------------------------------------------------|-------|-----|---------------------------------------------------------------------------------------|-----|---------------------------------------------------------------------------------------|-----|----------------|
|                 |  |  | μ m                   | 0.012                                                                                 | 0.025  | 0.05  | 0.1                                                                                   | 0.2  | 0.4                                                                                   | 0.8   | 1.6 | 3.2                                                                                   | 6.3 | 12.5                                                                                  | 25  | 50             |
|                 |  |  | GRADES                | N1                                                                                    | N2     | N3    | N4                                                                                    | N5   | N6                                                                                    | N7    | N8  | N9                                                                                    | N10 | N11                                                                                   | N12 |                |
|                 |  |  | SYMBOLS               |  |        |       |                                                                                       |      |  |       |     |  |     |  |     |                |
| TOLERANCE       |  |  | MATERIALS:<br>16MnCr5 |                                                                                       |        | 2019  |                                                                                       | NAME |                                                                                       | DATE  |     | 2002370.1600                                                                          |     |                                                                                       |     |                |
| FREE DIMENSIONS |  |  |                       |                                                                                       |        | DRAWN |                                                                                       | PGK  |                                                                                       | 20/07 |     |                                                                                       |     |                                                                                       |     |                |
| TOLERANCE       |  |  | CHECKED               |                                                                                       | RVL    |       | 20/07                                                                                 |      |                                                                                       |       |     |                                                                                       |     |                                                                                       |     |                |
| Dimms.          |  |  | Dia                   |                                                                                       | Length |       | APPROVED                                                                              |      |                                                                                       |       |     |                                                                                       |     |                                                                                       |     |                |
| 0.5 to 3        |  |  | ± 0.05                |                                                                                       | ± 0.10 |       |  |      |                                                                                       |       |     |                                                                                       |     |                                                                                       |     |                |
| 3 to 6          |  |  | ± 0.10                |                                                                                       | ± 0.15 |       | SCALE : NTS                                                                           |      | QTY. :                                                                                |       |     |                                                                                       |     |                                                                                       |     |                |
| 6 to 30         |  |  | ± 0.15                |                                                                                       | ± 0.20 |       | PART NAME:<br><br>SK50TMH16069FWW                                                     |      |                                                                                       |       |     | DRAWING No.<br><br>FWS509H-TMH16069                                                   |     |                                                                                       |     | REV.<br><br>00 |
| 30 to 120       |  |  | ± 0.20                |                                                                                       | ± 0.25 |       |                                                                                       |      |                                                                                       |       |     |                                                                                       |     |                                                                                       |     |                |
| 120 to 500      |  |  | ± 0.30                |                                                                                       | ± 0.50 |       |                                                                                       |      |                                                                                       |       |     |                                                                                       |     |                                                                                       |     |                |