





**MARKING : ISO7388-1 (DIN69871) SK50 AD/AF (AD+B) SFHC14H080
G2,5/25000 U/MIN**

Rev.No.	Ch.Let	Alterations	Date	Sign.	Appd.



For Customer Approval

**SCREWS TO BE PACKED SEPERATELY
IN PLASTIC POUCH WITH LABEL & PUT INTO
BORE & THEN SEAL THE
HOLDER WITH COVER
LABEL FOR PLASTIC BAGS:**
Verschlusschraube
Grub Screw
M3 X 5mm X1.5mm

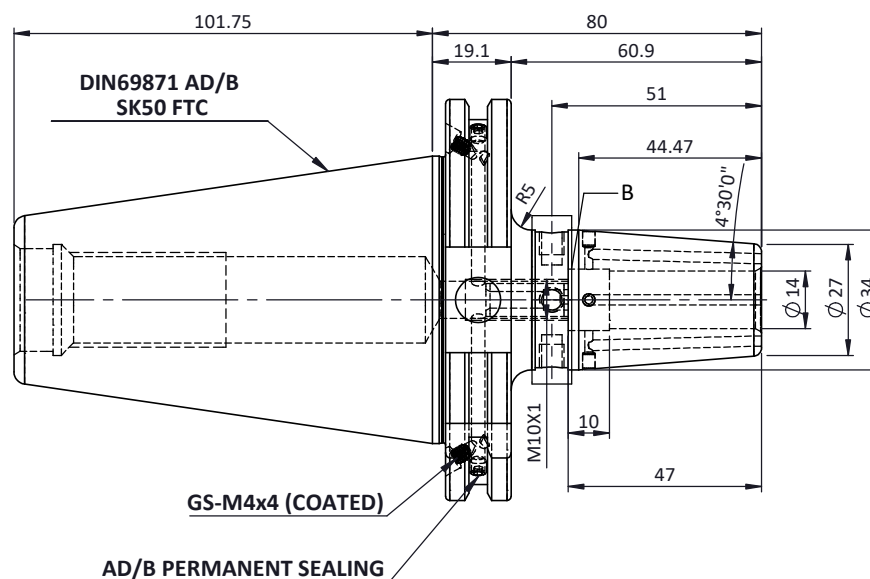

Notes	
Balancing Value	G2.5 @25000RPM
Approx Weight	2.7Kg

			μm	0.012	0.025	0.05	0.1	0.2	0.4	0.8	1.6	3.2	6.3	12.5	25	50				
			GRADES	N1	N2	N3	N4	N5	N6	N7	N8	N9	N10	N11	N12					
			SYMBOLS																	
TOLERANCE			MATERIALS:		2024		NAME		DATE								2002374.1400			
FREE DIMENSIONS					DRAWN		KATHIR		30/08											
TOLERANCE			HDS		CHECKED		RVL		30/08											
Dimns.		Dia	Length																	
0.5 to 3		±0.05	±0.10																	
3 to 6		±0.10	±0.15			SCALE : NTS		QTY. :												
6 to 30		±0.15	±0.20	PART NAME: SK50SFK14080FWW								DRAWING No. F1S509H-SFK14080								REV 00
30 to 120		±0.20	±0.25																	
120 to 250		±0.30	±0.50																	