



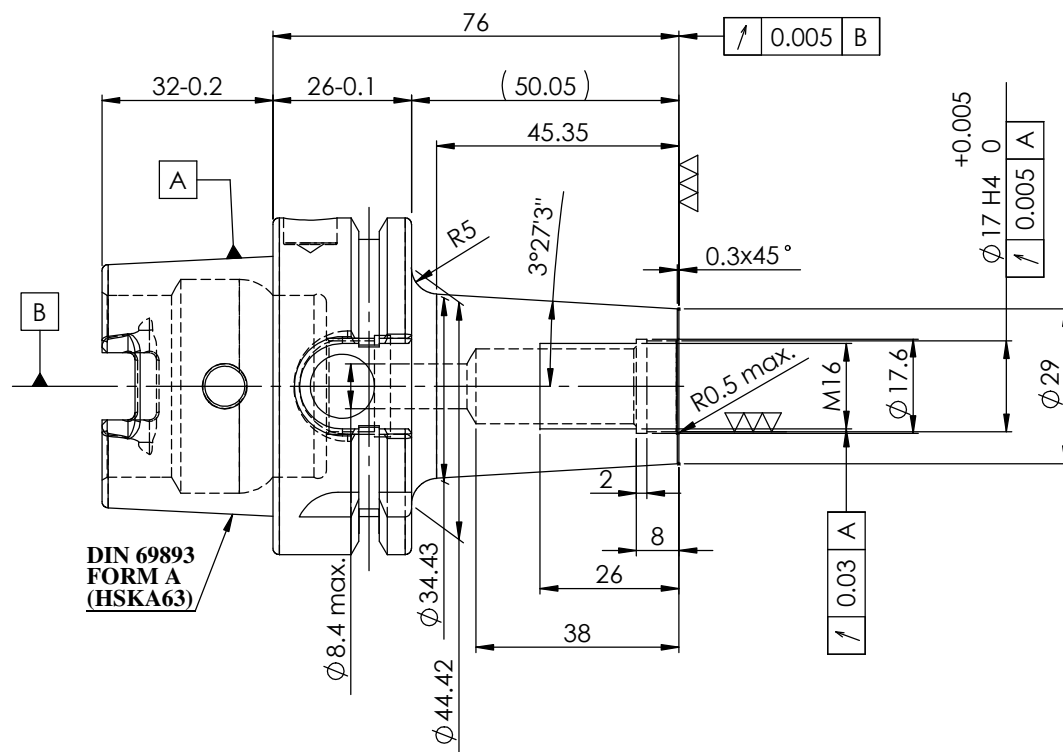

Rev.No.	Ch.Let	Alterations	Date	Sign.	Appd.

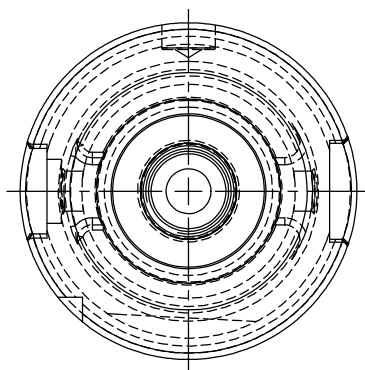

BALANCING 2.5G @ 25000 RPM

EINSCHRAUBFRÄSERAUFNAHME
SCREW-ON HOLDER
DIN 69893A HSK63A
ES M16 x 050 mm x 076 mm
G2,5 / 25000

**MARKING:- DIN 69893A HSK63A M16 X 050mm
G2,5 25000**

			μ m	0.012	0.025	0.05	0.1	0.2	0.4	0.8	1.6	3.2	6.3	12.5	25	50	
			GRADES	N1	N2	N3	N4		N5	N6	N7	N8	N9	N10	N11	N12	
			SYMBOLS														
TOLERANCE			MATERIALS: 16MnCr5			2019		NAME		DATE		2002382.1600					REV
FREE DIMENSIONS TOLERANCE						DRAWN		AMK		02/05							
Dimms.	Dia	Length			CHECKED		RVL		02/05								
0.5 to 3	± 0.05	± 0.10			APPROVED												
3 to 6	± 0.10	± 0.15			SCALE :		2:1		QTY. :								
6 to 30	± 0.15	± 0.20	PART NAME: HSKA63TMH16076WW							DRAWING No. FWA063H-TMH16076					00		
30 to 120	± 0.20	± 0.25															
120 to 500	± 0.30	± 0.50															