




**MARKING : DIN69893 A HSK100A SFHC18H160
G2,5/25000 U/MIN**

Rev.No	Ch.Let	Alterations	Date	Sign.	Appd.

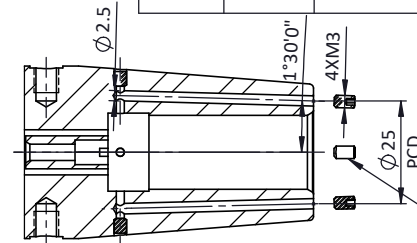


SECTION A-A

For Customer Approval

**SCREWS TO BE PACKED SEPERATELY
IN PLASTIC POUCH WITH LABEL & PUT INTO
BORE & THEN SEAL THE
HOLDER WITH COVER**

LABEL FOR PLASTIC BAGS:
Verschlusschraube
Grub Screw
M3 X 5mm X1.5mm

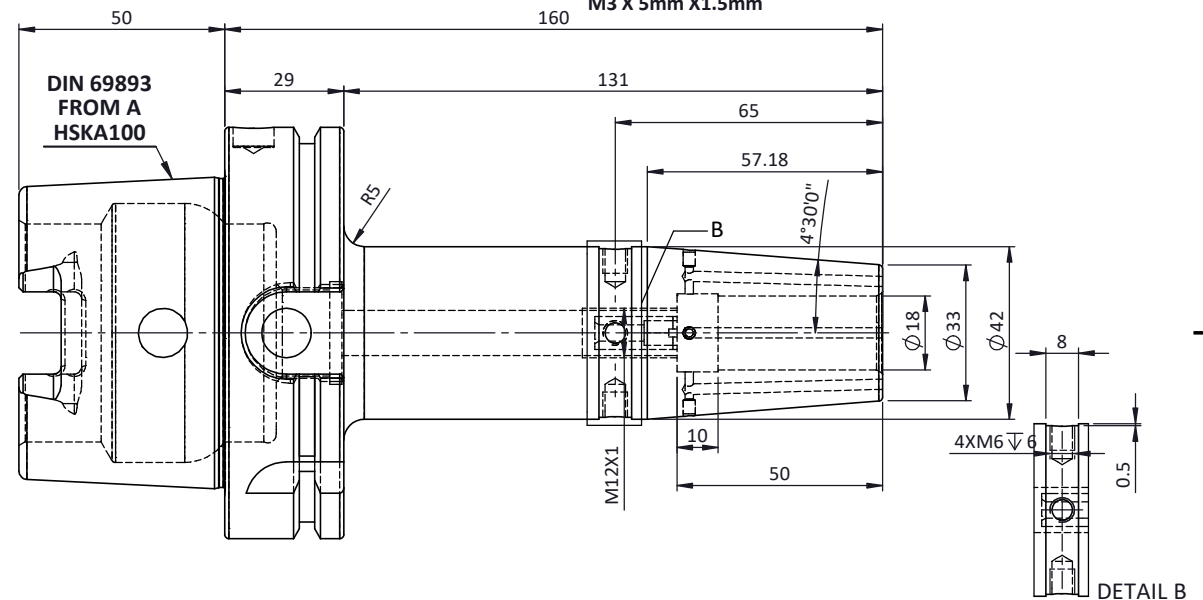

	Notes
Balancing Value	G2.5 @25000RPM
Approx Weight	3.0Kg

			μm	0.012	0.025	0.05	0.1	0.2	0.4	0.8	1.6	3.2	6.3	12.5	25	50		
			GRADES	N1	N2	N3	N4	N5	N6	N7	N8	N9	N10	N11	N12			
			SYMBOLS															
TOLERANCE FREE DIMENSIONS TOLERANCE			MATERIALS: HDS		2022		NAME		DATE		2002387.1802							
					DRAWN		SVR		16/04									
Dimms.	Dia	Length					CHECKED		RVL								16/04	
0.5 to 3	±0.05	±0.10					APPROVED											
3 to 6	±0.10	±0.15					SCALE : NTS		QTY. :									
6 to 30	±0.15	±0.20	PART NAME:									DRAWING No.				REV		
30 to 120	±0.20	±0.25	HSKA100SFK18160WW									F1A100H-SFK18160				00		
120 to 500	±0.30	±0.50																