


Verbindungsglied Güte 10

- **Robuste Ausführung**
In RAL 3022 lachsrot lackiertes Metall.
- **Geprüfte Sicherheit**
H-Stempel, Güteklasse 10.

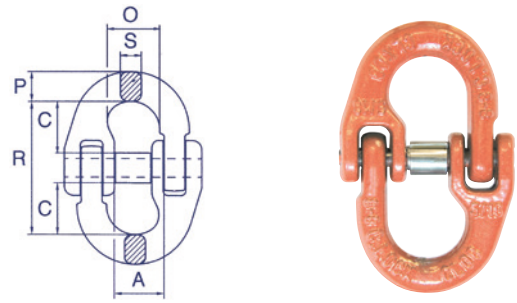


für Kette Ø mm	Maß A mm	Maß C mm	Maß O mm	Maß R mm	Maß P mm	Maß S mm	Gewicht kg	Tragfähigkeit kg	€	Bestell-Nr.
6	14,0	18,0	18,0	45,0	8,0	7,5	0,07	1400	13,70	3060 2337
7	17,8	20,0	20,5	50,5	10,2	9,0	0,14	1900	14,35	3060 2338
8	19,0	25,5	23,5	62,0	11,5	10,0	0,20	2500	16,40	3060 2339
10	23,8	30,0	27,5	72,0	12,6	12,6	0,35	4000	19,40	3060 2340
13	28,0	36,0	33,3	87,3	19,6	16,7	0,74	6700	32,20	3060 2341
16	34,3	40,5	39,5	105,0	20,6	20,6	1,16	10000	49,60	3060 2342
20	42,0	46,5	46,0	113,0	29,0	25,0	2,05	16000	85,90	3060 2343
22	49,0	55,0	58,0	133,0	30,0	28,0	3,10	19000	114,00	3060 2344

(B456)

Verkürzungsklaue mit Sicherung

- **Robuste Ausführung**
Rot lackiertes Metall.
- **Geprüfte Sicherheit**
H-Stempel, Güteklasse 8.

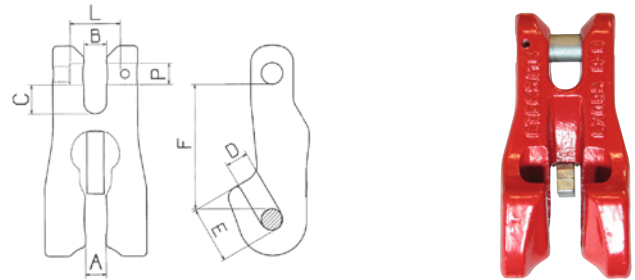


für Kette Ø mm	Maß A mm	Maß B mm	Maß C mm	Maß D mm	Maß E mm	Maß F mm	PxL mm	Gewicht kg	Tragfähigkeit kg	€	Bestell-Nr.
6	8,0	8,0	10,0	8,0	19,0	45	7,5x17,5	0,21	1120	33,00	3060 2004
7	9,5	9,5	10,0	9,5	23,5	56	9,0x22,5	0,48	1500	40,70	3060 2005
8	9,5	9,5	10,0	9,5	23,5	56	10,0x22,5	0,48	2000	40,60	3060 2006
10	12,0	12,0	14,5	12,0	32,5	78	13,0x31,5	1,12	3150	53,10	3060 2007
13	15,5	15,5	18,0	15,5	44,0	90	16,0x42,0	1,83	5300	72,00	3060 2008
16	19,0	21,0	21,0	19,0	50,0	106	21,0x51,5	2,83	8000	101,50	3060 2009

(B456)

Verkürzungsklaue mit Sicherung

- **Robuste Ausführung**
In RAL 3022 lachsrot lackiertes Metall.
- **Geprüfte Sicherheit**
H-Stempel, Güteklasse 10.

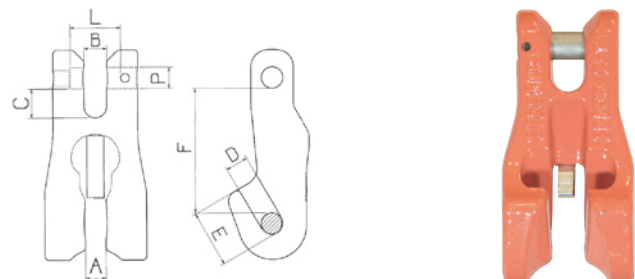

für Kette Ø mm	Maß A mm	Maß B mm	Maß C mm	Maß D mm	Maß E mm	Maß F mm	PxL mm	Gewicht kg	Tragfähigkeit kg	€	Bestell-Nr.
6	8,0	8,0	10,0	8,0	19,0	45,0	7,5x17,5	0,21	1400	34,60	3060 2345
7	9,5	9,5	10,0	9,5	23,5	56,0	9,0x22,5	0,48	1900	43,40	3060 2346
8	9,5	9,5	10,0	9,5	23,5	56,0	10,0x22,5	0,48	2500	43,50	3060 2347
10	12,0	12,0	14,5	12,0	32,5	78,0	13,0x31,5	1,12	4000	57,20	3060 2348
13	15,5	15,5	18,0	15,5	44,0	90,0	16,0x42,0	1,83	6700	82,40	3060 2349
16	19,0	21,0	21,0	19,0	50,0	106,0	21,0x51,5	2,83	10000	114,50	3060 2350

(B456)