

Klemmhülse für Gewindebohrer


Ausführung: Mit Morsekegel zur Aufnahme von zylindrischen Gewindebohrern mit Vierkantmitnahme. Kraft- und formschlüssige Aufnahme. Komplett gehärtet.

DIN
6328

FAHRION®
PRÄZISION

Typ	Bohrungs- \varnothing		K mm	L mm	FAHRION® 3476	Bestell- Nr.
	mm	MK außen			€	
FM501/1	3,5	1	12,2	65,5	20,00	...0001
FM501/1	4	1	12,2	65,5	20,00	...0003
FM501/1	4,5	1	12,2	65,5	20,00	...0005
FM501/1	5	1	12,2	65,5	20,00	...0007
FM501/1	5,5	1	12,2	65,5	20,00	...0009
FM501/1	6	1	12,2	65,5	20,00	...0011
FM501/1	7	1	12,2	65,5	20,00	...0013
FM501/1	8	1	12,2	65,5	20,00	...0015
FM501/2	5,5	2	18	80	22,50	...0017
FM501/2	6	2	18	80	22,50	...0019
FM501/2	7	2	18	80	22,50	...0021
FM501/2	8	2	18	80	22,50	...0023
FM501/2	9	2	18	80	22,50	...0025
FM501/2	10	2	18	80	22,50	...0027
FM501/2	11	2	18	80	22,50	...0029
FM501/2	12	2	18	80	22,50	...0031
FM501/3	8	3	24,1	99	30,40	...0033
FM501/3	9	3	24,1	99	30,40	...0035
FM501/3	10	3	24,1	99	30,40	...0037
FM501/3	11	3	24,1	99	30,40	...0039
FM501/3	12	3	24,1	99	30,40	...0041
FM501/3	14	3	24,1	99	30,40	...0043
FM501/3	16	3	24,1	99	30,40	...0045
FM501/4	12	4	31,6	124	45,00	...0047
FM501/4	14	4	31,6	124	45,00	...0049
FM501/4	16	4	31,6	124	45,00	...0051
FM501/4	18	4	31,6	124	45,00	...0053
FM501/4	20	4	31,6	124	45,00	...0055
FM501/4	22	4	31,6	124	45,00	...0059
FM501/4	25	4	31,6	124	45,00	...0061

(W315)

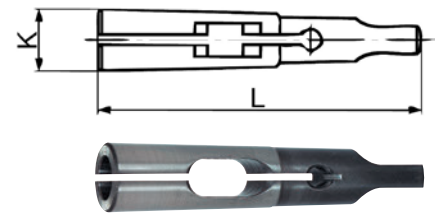

3.5

format
professional quality

Gewindegrenzlehndorn

Aus gehärtetem Lehenstahl,
Toleranzklasse 6H für metrische
ISO-Regelgewinde DIN 13
finden Sie auf 4/150.



4356