

### Aufsatzbacke

**Ausführung:** Ungestuft, aus 16MnCr5, ungehärtet.

**3056** 3-teiliger Satz.

**3058** 4-teiliger Satz.



Größe mm	Backenlänge mm	Backenbreite mm	Backenhöhe mm	RÖHM	RÖHM	Bestell- Nr.
				3056 3-teilig €	3058 4-teilig €	
100/110	53	22,5	30	77,70	104,00	...0100
125	62	26,5	38	77,70	104,00	...0125
140/160	74	28,5	42	48,00	64,00	...0160
200	87	30,5	43	50,60	68,00	...0200
250	103	36,5	53	77,70	104,00	...0250
315	120	42,5	58	116,50	154,50	...0315
350/400	137	42,5	65	231,00	308,50 ◊	...0400
500/630	140	50,5	80	347,50 ◊ (W301)	461,00 ◊ (W301)	...5063




3.2

### Befestigungsschraube für Aufsatzbacken

Größe mm	Gewinde	RÖHM	Bestell- Nr.
		3068 Schraube 1 €	
100/110	M6 x 20	2,84	...0001
125	M8 x 25	2,84	...0004
140/160/200	M8 x 30	2,84	...0007
250	M12 x 40	4,31	...0010
315	M12 x 45	4,31	...0013
350/400	M16 x 50	5,65	...0016
500/630	M20 x 80	7,80	...0019

(W338)

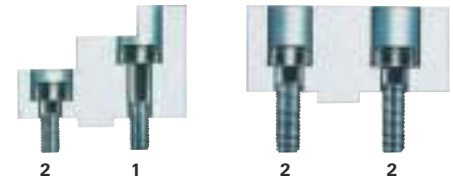

Größe mm	Gewinde	RÖHM	Bestell- Nr.
		3070 Schraube 2 €	
100/110	M6 x 16	2,84	...0001
125/140/160/200	M8 x 20	2,84	...0004
250	M12 x 25	4,31	...0007
315	M12 x 30	4,31	...0010
350/400	M16 x 35	5,65	...0013
500/630	M20 x 40	7,15	...0016

(W338)



### Späneschutz für Drehfutter

**Anwendung:** Zum Einstecken in die Backenführung. Verhindert das Eindringen der Späne in den Futterkörper.



Größe mm	RÖHM	Bestell- Nr.
	3072 €	
80	2,84	...0001
100	3,51	...0004
125	4,46	...0007
160	5,65	...0010
200	7,00	...0013
250	8,75	...0016
315/400	11,05	...0019
500/630	17,75	...0022

(W301)

