


Aufhängeringe ohne Flachstelle GK8 für 3- und 4-strängige Anschlagketten

- **Geprüfte Sicherheit**
Gemäß EN 1677-4, Güteklasse 8.





für Kette 3 Stränge Ø	für Kette 4 Stränge Ø	Maß d1	Maß t1	Maß w1	Maß d2	Maß t2	Maß w2	Gewicht	Trag- fähigkeit 0-45° kg	Trag- fähigkeit 45-60° kg	€	Bestell-Nr.
mm	mm	mm	mm	mm	mm	mm	mm	kg				
6/7	6/7	18	135	75	13	54	25	1,16	3150	2240	26,10	3060 2158
8	8	22	160	90	16	70	34	2,22	4250	3000	39,70	3060 2159
10	10	26	180	100	18	85	40	3,36	6700	4750	52,70	3060 2160
13	13	32	200	110	22	115	50	6,02	11200	8000	88,10	3060 2161
16	16	36	260	140	26	140	65	9,94	17000	11800	152,00	3060 2162

(B456)

Aufhängeringe ohne Flachstelle GK10 für 3- und 4-strängige Anschlagketten

- **Geprüfte Sicherheit**
Gemäß EN 1677-4, Güteklasse 10.

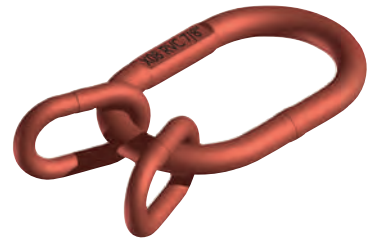


für Kette 3 Stränge Ø	für Kette 4 Stränge Ø	Maß d1	Maß t1	Maß w1	Maß d2	Maß t2	Maß w2	Gewicht	Trag- fähigkeit 0-45° kg	Trag- fähigkeit 45-60° kg	€	Bestell-Nr.
mm	mm	mm	mm	mm	mm	mm	mm	kg				
6/7	7	18	135	75	13	54	25	1,16	4000	2850	37,50	3060 2332
8	8	22	160	90	16	70	34	2,22	5300	3750	56,90	3060 2333
10	10	26	180	100	18	85	40	3,36	8000	6000	73,30	3060 2334
13	13	32	200	110	22	115	50	6,02	14000	10000	116,00	3060 2335
16	16	36	260	140	26	140	65	9,94	21200	15000	182,00	3060 2336

(B456)

Verbindungsglied

- **Robuste Ausführung**
Rot lackiertes Metall.
- **Geprüfte Sicherheit**
H-Stempel, Güteklasse 8.



für Kette Ø	Maß A	Maß C	Maß O	Maß R	Maß P	Maß S	Gewicht	Tragfä- higkeit kg	€	Bestell-Nr.
mm	mm	mm	mm	mm	mm	mm	kg			
6	16,0	18,0	16,5	43,0	7,2	6,8	0,07	1120	10,75	3060 1994
7	17,8	20,0	20,5	50,5	10,2	9,0	0,10	1500	11,15	3060 1995
8	19,0	25,5	23,5	62,0	11,5	10,0	0,25	2000	12,85	3060 1996
10	23,8	30,0	27,5	72,0	12,6	12,6	0,35	3150	15,50	3060 1997
13	28,0	36,0	33,3	87,3	19,0	16,7	0,68	5300	25,40	3060 1998
16	34,3	40,5	39,5	103,0	20,6	20,6	1,10	8000	41,30	3060 1999
20	44,0	48,0	47,0	116,0	23,0	23,0	1,70	12500	57,60	3060 2000
22	49,0	51,0	55,0	133,0	26,5	26,5	2,20	15000	86,60	3060 2001
26	60,0	60,0	66,0	148,0	31,5	31,5	4,20	21200	168,50	3060 2002
32	80,0	77,0	86,0	190,0	40,0	32,0	7,19	31500	373,00	3060 2003

(B456)