



All Dimensions are in MM

Rev.No.	Ch.Let	Alterations	Date	Sign.	Appd.

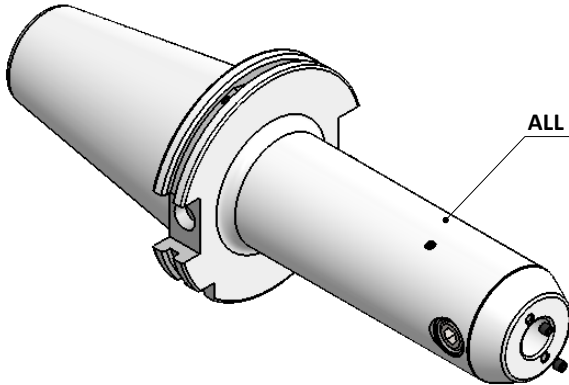

ALL SILVER LOOK

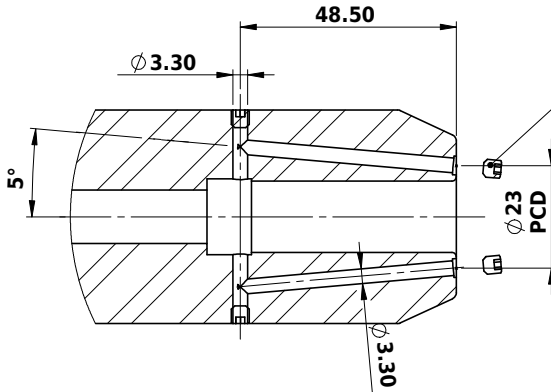

**SCREWS TO BE PACKED SEPERATELY
IN PLASTIC POUCH WITH LABEL & PUT INTO
WELDON BORE & THEN SEAL THE HOLDER WITH COVER**

LABEL FOR PLASTIC BAGS:
Verschlussschraube
Grub Screw
M4 X 4mm x 2 mm


CUSTOMER APPROVAL REQUIRED

APPROVED BY

DATE _____

FOR QUOTATION PURPOSE ONLY

B-B (1 : 1.2)

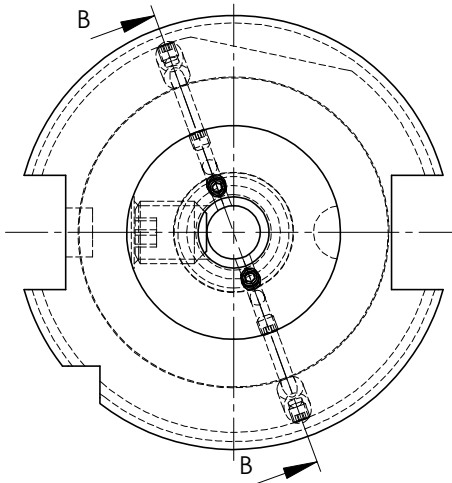


Label :
2002366.1602
WELDON-AUFNAHME MIT KK
WELD.HOLDER COOL.CHANNEL
DIN69871 SK50 ADB
Wk 16 mm x 160 mm
G2.5 / 25000 U/MIN

NOTE :
BALANCING 2.5G AT 25000 RPM
WEIGHT : 4.3 kg

**MARKING : DIN 69871 AD/B SK50 WK16 H160
G2.5 25000 U/MIN**

ITEM NO.	PART NUMBER	DESCRIPTION	QTY.
1	GS-M4X4	GRUB SCREW-(B.O)	6
2	GS-M14X16-DIN1835-B	GRUB SCREW-(B.O)	1
3	FWS509H-EKH16160	SK50EK16160FWW	1

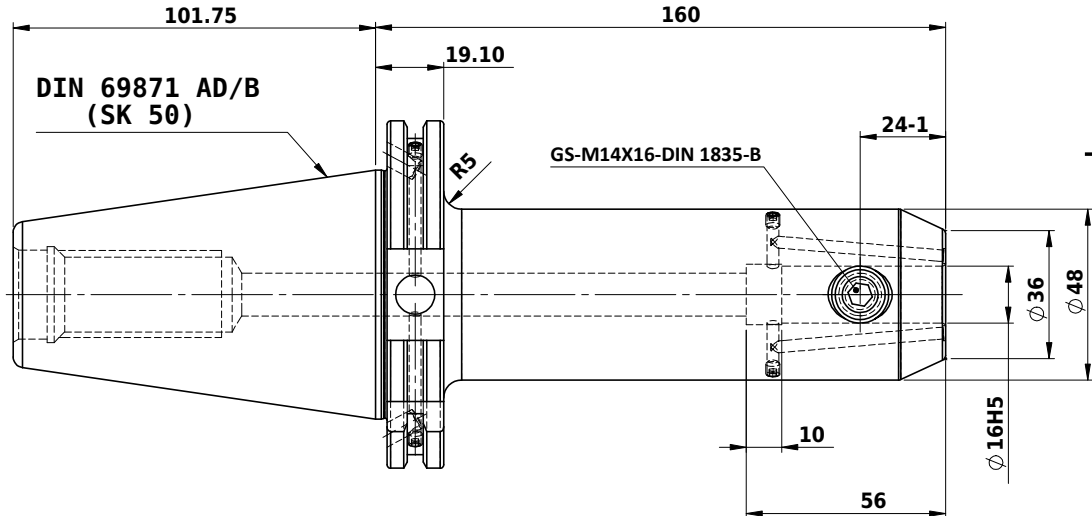

			μ m	0.012	0.025	0.05	0.1	0.2	0.4	0.8	1.6	3.2	6.3	12.5	25	50
			GRADES	N1	N2	N3	N4	N5	N6	N7	N8	N9	N10	N11	N12	
			SYMBOLS	▽▽▽			▽▽▽			▽▽			▽		~	
TOLERANCE FREE DIMENSIONS TOLERANCE			MATERIALS: 16MnCr5			2017	NAME	DATE	2002366.1602							
						DRAWN	SVK	30/10								
Dimns.	Dia	Length		CHECKED	RVL	30/10										
0.5 to 3	± 0.05	± 0.10		APPROVED												
3 to 6	± 0.10	± 0.15		SCALE : NTS		QTY. :										
6 to 30	± 0.15	± 0.20	PART NAME: SK50EK16160FWW						DRAWING No. FWS509H-EKH16160						REV 00	
30 to 120	± 0.20	± 0.25														
120 to 500	± 0.30	± 0.50														