



All Dimensions are in MM

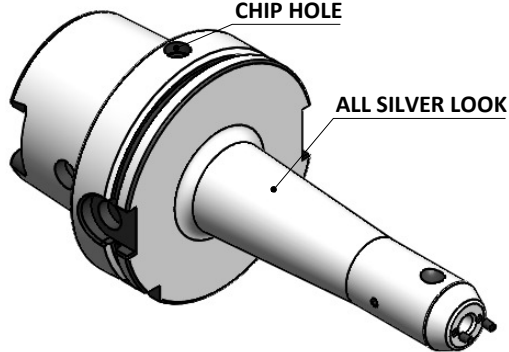

PERMENENT SEALING
WITH LOCTITE





A-A

SCREWS TO BE PACKED SEPERATELY
IN PLASTIC POUCH WITH LABEL & PUT INTO
WELDON BORE & THEN SEAL THE HOLDER WITH COVER

LABEL FOR PLASTIC BAGS:

Verschlusschraube
Grub Screw
M3 X 5mm x 1.5 mm

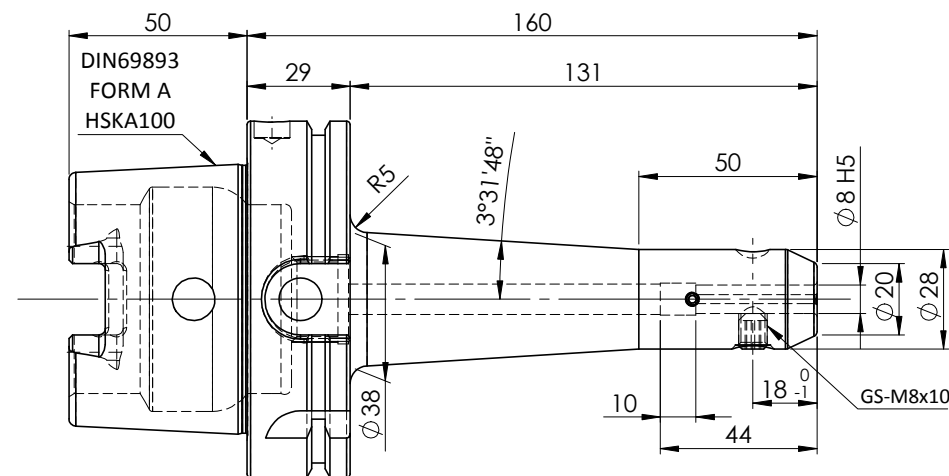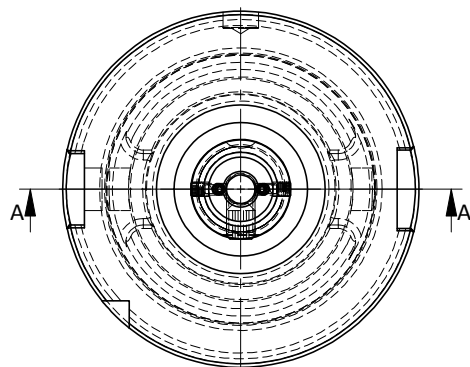

LABEL :

2002379.0802

WELDON-AUFNAHME MIT KK
WELD.HOLDER COOL.CHANNEL

DIN69893 HSK100A

WK 08 mm x 160 mm

G2.5 25000 U / MIN

MARKING : DIN 69893 A HSK100A WK08 H160
G2.5 25000 U/MIN

ITEM NO.	PART NUMBER	DESCRIPTION	QTY
1	FWA100H-EKH08160	HSKA100EK08160WW	1
2	GS-M8X10	GRUB SCREW(B.O)	1
3	GS-M3X5	GRUB SCREW	2
4	GS-M4X4	GRUB SCREW	2

NOTE :

BALANCING 2.5G AT 25000 RPM

WEIGHT : 2.7 kg

		μ m	0.012	0.025	0.05	0.1	0.2	0.4	0.8	1.6	3.2	6.3	12.5	25	50
		GRADES	N1	N2	N3	N4	N5	N6	N7	N8	N9	N10	N11	N12	
		SYMBOLS													
		MATERIALS:	2015	NAME	DATE										
		FREE DIMENSIONS TOLERANCE	16Mncr5	DRAWN	ELA	18/5									
		Dimns.	Dia	Length	CHECKED	RVL	18/5								
		0.5 to 3	± 0.05	± 0.10	APPROVED										
		3 to 6	± 0.10	± 0.15	SCALE : NTS	QTY. :									
		6 to 30	± 0.15	± 0.20											
		30 to 120	± 0.20	± 0.25											
		120 to 500	± 0.30	± 0.50											
		PART NAME:	HSKA100EK08160WW				DRAWING No.				FWA100H-EKH08160				REV.
															02