



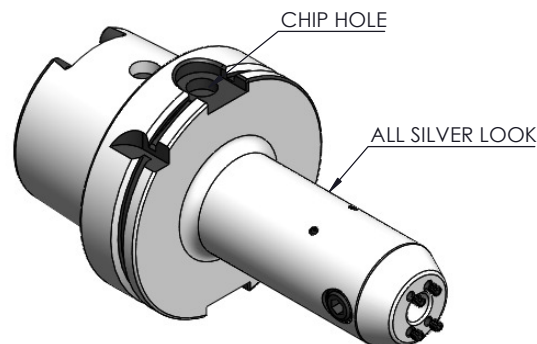


All Dimensions are in MM

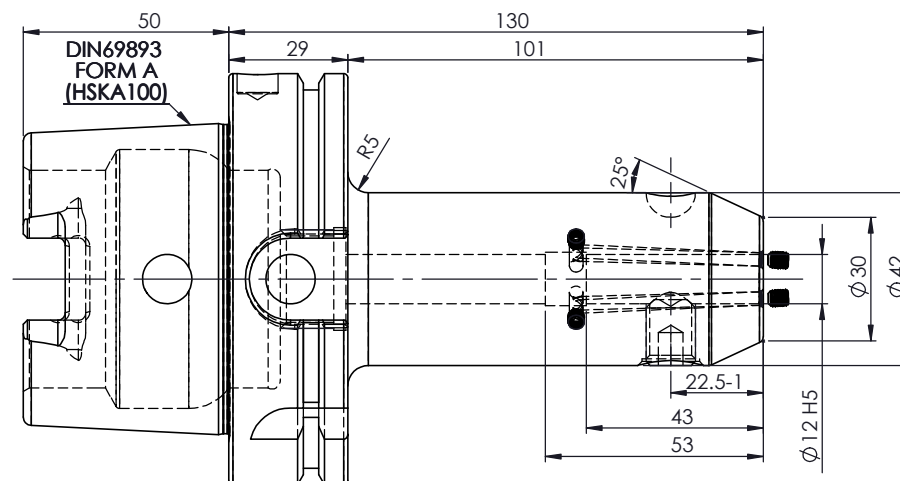

For Customer Approval

SCREWS TO BE PACKED SEPARATELY
IN PLASTIC POUCH WITH LABEL & PUT INTO
WELDON BORE & THEN SEAL THE HOLDER WITH COVER
LABEL FOR PLASTIC BAGS:
Verschlusschraube
Grub Screw
M4 X 4MM x 4 NO'S

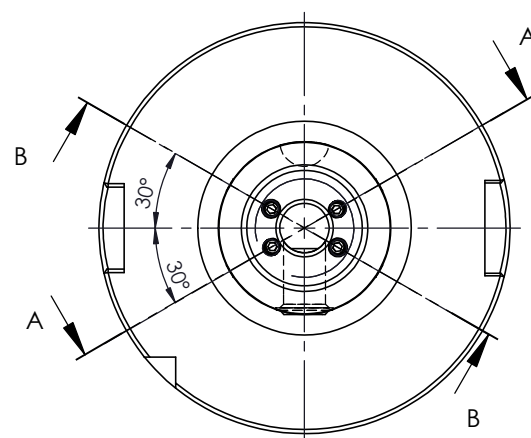

LABEL :

2002379.1205
WELDON-AUFNAHME MIT KK
WELD.HOLDER COOL.CHANNEL
DIN69893 HSK100A
WK 12 mm x 130 mm
G2.5 25000 U/MIN

NOTE :

BALANCING 2.5G AT 25000 RPM

WEIGHT :2.90kg

**MARKING : DIN 69893 A HSK100A WK12 H130
G2.5 25000 U/MIN**

ITEM NO.	PART NUMBER	DESCRIPTION	QTY.
1	FWA100H-EKH12130	HSKA100EK12130WW	1
2	GS-M12X16	GRUB SCREW	1
3	GS-M4X4-COATING	GRUB SCREW	8

		μm	0.012	0.025	0.05	0.1	0.2	0.4	0.8	1.6	3.2	6.3	12.5	25	50
		GRADES	N1	N2	N3	N4	N5	N6	N7	N8	N9	N10	N11	N12	
		SYMBOLS													
		TOLERANCE													
		FREE DIMENSIONS													
		TOLERANCE													
		Dimns.	Dia	Length											
		0.5 to 3	± 0.05	± 0.10											
		3 to 6	± 0.10	± 0.15											
		6 to 30	± 0.15	± 0.20											
		30 to 120	± 0.20	± 0.25											
		120 to 500	± 0.30	± 0.50											
		MATERIALS:	2023	NAME	DATE										
		16MnCr5	DRAWN	YJK	27/11										
			CHECKED	RVL	27/11										
			APPROVED												
			SCALE : NTS	QTY. :											
		PART NAME:													
		HSKA100EK12130WW													
		DRAWING No.													
		FWA100H-EKH12130													
		REV.													
		00													

2002379.1205